Boling power is the key!

## Strong boiling power and turning force pull out the tastiness of noodles.

Generates strong boiling power and turning force! Built-in heaters adopted in the pot.

Heaters are casted inside the pot. This makes good use of the heat during heating, coming to a boil quickly and no waste in the cost.

Casted-in heaters concentrated especially in the front side focus on heating up the front side of the pot, generating strong convection currents from front side toward back side. This makes noodles turn around in the pot vigorously and boil in a delicious manner.
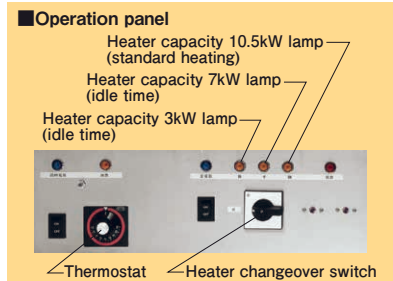
Operability makes difference in peak time. Also contributes to energy-saving!

Water-bath pot is installed to use for warming the bowls (MES-DL). In the front side of the pot there is an enough space for arrangement to enable speedy serving.
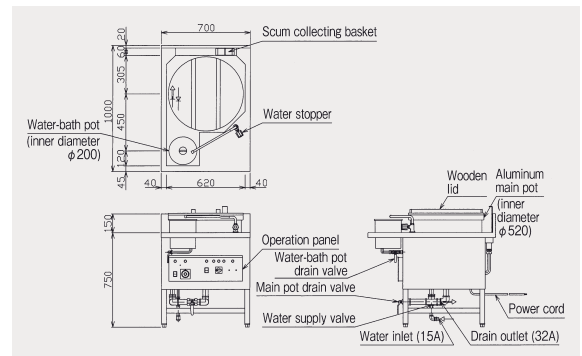
High limit switch assures prevention of overheating.

Overheating preventive structure, which has a high limit switch built in to shut off the circuit automatically in case of overheating, is mounted.

■Operation panel

- Heater capacity 10.5kW lamp (standard heating)
- Heater capacity 7kW lamp (idle time)
- Heater capacity 3kW lamp (idle time)
- Thermostat
- Heater changeover switch

Deluxe Type
●MES−DL (w/water-bath pot)
List Price : ¥1,590,000 (tax-excluded)

Casted Amount **2.0kg**
Water Capacity **40ℓ**

700 — Scum collecting basket
Water-bath pot (inner diameter φ200)
Water stopper
Wooden lid
Aluminum main pot (inner diameter φ520)
Operation panel
Water-bath pot drain valve
Main pot drain valve
Water supply valve
Power cord
Water inlet (15A) Drain outlet (32A)

Standard Type
●MES−SL
List Price : ¥1,490,000 (tax-excluded)

Casted Amount **2.0kg**
Water Capacity **40ℓ**

Water stopper
700
Wooden lid
Aluminum main pot (inner diameter φ520)
Operation panel
Main pot drain valve
Water supply valve
Power cord
Water inlet (15A) Drain outlet (32A)
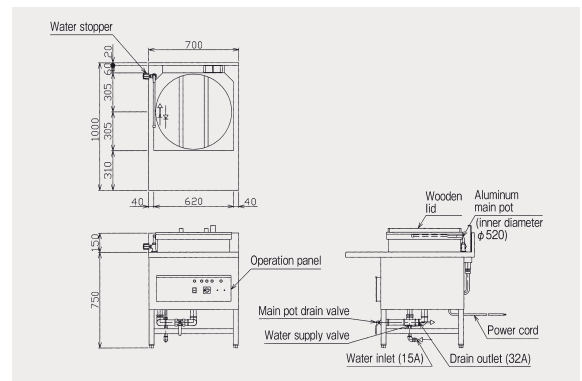
■Electric Udon / Soba Boiler Specifications Table

Model		External Dimension (mm)				Main pot water amount (ℓ)	Water bath pot water amount (ℓ)	Power (50/60Hz)	Power consumption (kW)	Necessary hand switch capacity	Power cord	Water inlet	Drain outlet	Accessories	Weight (kg)	List price (tax-excluded)
		Width	Depth	Height	Back											
Deluxe Type (w/water-bath)	MES-DL	700	1000	750	150	40	1	3φ200V	11.0	40A	2m 8mm² -4cores direct connecting	15A	32A	Wooden lid (1), Water-bath pot lid (1), Drain pulling rod (1)	108	¥1,590,000
	MES-DR	700	1000	750	150			3φ200V	11.0	40A		15A	32A		108	
Standard Type	MES-SL	700	1000	750	150	40	—	3φ200V	10.5	40A		15A	32A	Wooden lid (1), Drain pulling rod (1)	103	¥1,490,000
	MES-SR	700	1000	750	150			3φ200V	10.5	40A		15A	32A		103	

●Delivery time is about 1month after receipt of order.