

Backside Exhaust Chinese Range *MRO Series* Auto-ignition *MRO*

Prevents temperature rising and keeps the kitchen comfortable!




The high exhaust stack guides the exhaust heat smoothly to the hood, which prevents the temperature rising in the kitchen and realize comfortable working environment.

Recommended by
Osaka Gas Co.,Ltd.

MRO-B21

List price **¥450,000**
(tax-excluded)

Frying (Screw Blast Burner)

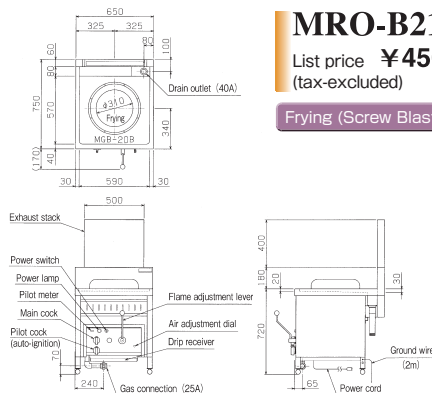


MRO-S11

List price **¥245,000**
(tax-excluded)

Soup

PATENTED



MRO Series Specifications Table

Model	External dimensions (mm)				Gas consumption		Gas connection	Drain outlet	Rated voltage (50/60Hz)	Power consumption	Power cord	Weight (kg)	Stove
	Width	Depth	Height	Back	Town gas	LP gas							
MRO-B21	650	750	720	230	23.3kW (20,000kcal/h)	23.3kW (1.67kg/h)	25A	40A	1 φ100V	30/35W	2.5m with plug (w/ground wire) (Ⓢ)	103	Frying
MRO-S11	650	750	720	230	12.8kW (11,000kcal/h)	12.8kW (0.92kg/h)	25A	—	—	—	—	84	Soup

※The height of exhaust stack is 400mm. ※Delivery date of MRO Series is about 2 weeks after receipt of order.

※When using MRO-B21 with LP gas or town gas 13A, please specify, at the time of order, the frequency of the place where the machine is used. (50Hz or 60Hz)