

## Thermostat Griddle

The countertop line includes Griddle, Charbroiler, and Hot plate that can be adjusted to line up with even height for a great appearance in any cooking application.

With robust construction, continuous output, and operator friendly controls, all equipment meets all commercial cooking demands!

CP-G24-TP



### PRODUCT SPECIFICATIONS -

- Four specifications of 12" 24" 36" 48" 60" 72" on models. 28,000; 56,000; 84,000; 112,000; 140,000; 168,000 BTU/h
- Gas control knob every 12"
- Thermostat range 200° – 450°F (93°C – 232°C)
- Cool-to-the-touch front S/S edge
- All stainless steel cabinet, Standing pilot ignition system
- Back and side splash guards fully welded to griddle plate
- Adjustable stainless steel non-skid feet
- Easy to remove 4 1/2" quart grease drawer with weep hole
- Shipped standard Natural gas, LP conversion it included.




### MODEL LIST --

Model	Gas Type	Burners	Total BTU	Overall Dimensions	Net Weight	Package Size	Shipping Weight
CP-G12-TP	Natural Gas / Liquid Propane	1	28,000	12" x 28.7" x 15.4" 30.4 x 72.8 x 39.4 cm	117 lbs 53kg	15.75" x 35.5" x 19.25" 40 x 85 x 49 cm	143 lbs 65 kg
CP-G24-TP	Natural Gas / Liquid Propane	2	56,000	24" x 28.7" x 15.4" 60.9 x 72.8 x 39.4 cm	156 lbs 71 kg	27.5" x 35.5" x 19.25" 70 x 85 x 49 cm	240 lbs 109 kg
CP-G36-TP	Natural Gas / Liquid Propane	3	84,000	36" x 28.7" x 15.4" 91.4 x 72.8 x 39.4 cm	220 lbs 100 kg	39.5" x 35.5" x 19.25" 100 x 85 x 49 cm	338 lbs 154 kg
CP-G48-TP	Natural Gas / Liquid Propane	4	112,000	48" x 28.7" x 15.4" 122 x 72.8 x 39.4 cm	348 lbs 158 kg	51.25" x 35.5" x 19.25" 130 x 85 x 49 cm	424 lbs 193 kg
CP-G60-TP	Natural Gas / Liquid Propane	5	140,000	60" x 28.7" x 15.4" 153 x 72.8 x 39.4 cm	484 lbs 220 kg	63" x 35.5" x 19.25" 160 x 85 x 49 cm	567 lbs 258 kg
CP-G72-TP	Natural Gas / Liquid Propane	6	168,000	72" x 28.7" x 15.4" 182.9 x 72.8 x 39.4 cm	651 lbs 296 kg	63" x 35.5" x 19.25" 190 x 85 x 49 cm	759 lbs 345 kg

PLAN VIEW --

Thermostat Griddle

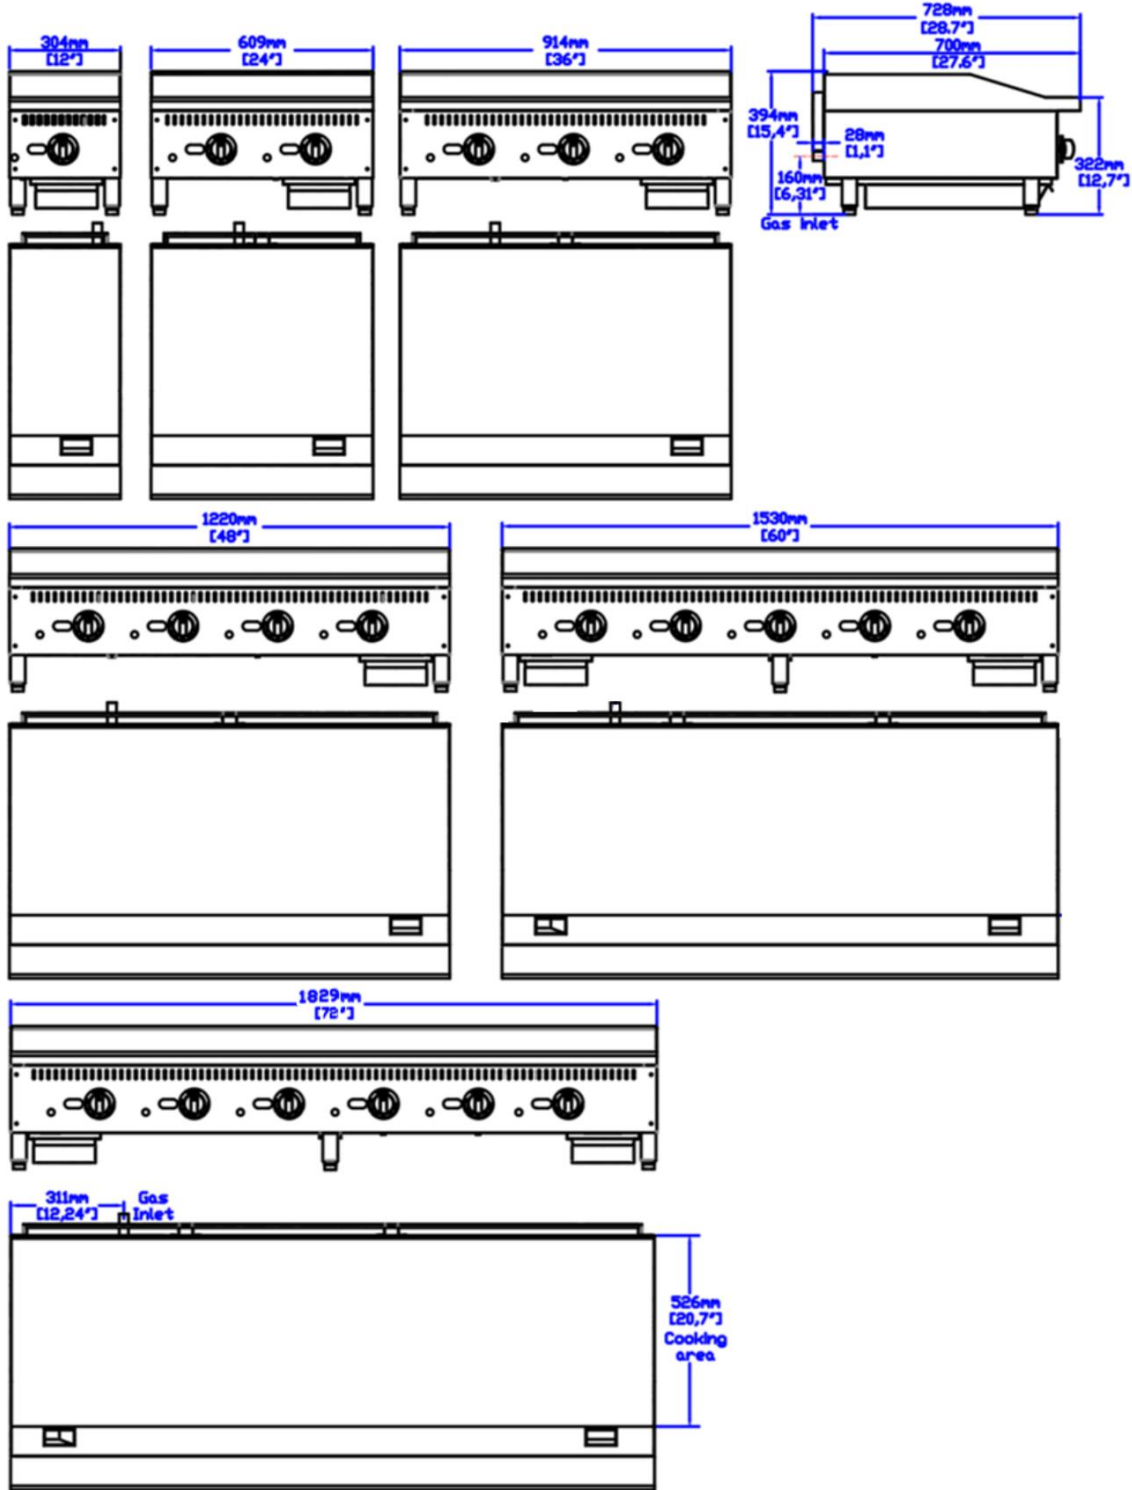

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI)  
 Natural gas operating pressure - 5.0" W.C, Recommended supply pressure 7-9" W.C.  
 Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C.
- A gas pressure regulator supplied with unit must be installed.
- An adequate ventilation system is required for Commercial Cooking Equipment.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- ETL certified NSF listed.

