

Heavy duty Gas Griddle

The countertop line includes Griddle, Charbroiler, and Hot plate that can be adjusted to line up with even height for a great appearance in any cooking application. With robust construction, continuous output, and operator friendly controls, all equipment meets all commercial cooking demands!

CP-G36-H




PRODUCT SPECIFICATIONS --

- Five specifications of 24" 36" 48" 60" 72" on models.
60,000, 90,000, 120,000, 150,000, 180,000 BTU/h
- Gas control knob every 12"
- 1" griddle plate, Standing pilot ignition system
- Cool-to-the-touch front S/S edge
- All stainless steel cabinet
- Back and side splash guards fully welded to griddle plate
- Adjustable stainless steel non-skid feet
- Easy to remove 4 1/2" quart grease drawer with weep hole
- Shipped standard Natural gas, LP conversion kit included.

MODEL LIST --

Model	Gas Type	Burners	Total BTU	Overall Dimensions	Net Weight	Package Size	Shipping Weight
CP-G24-H	Natural Gas / Liquid Propane	2	60,000	24" x 33" x 15.4" 60.9 x 83.8 x 39.4 cm	218 lbs 99 kg	27.6" x 37.5" x 20.5" 70 x 95 x 52 cm	262 lbs 119 kg
CP-G36-H	Natural Gas / Liquid Propane	3	90,000	36" x 33" x 15.4" 91.4 x 83.8 x 39.4 cm	284 lbs 129 kg	39.4" x 37.5" x 20.5" 100 x 95 x 52 cm	339 lbs 154 kg
CP-G48-H	Natural Gas / Liquid Propane	4	120,000	48" x 33" x 15.4" 122 x 83.8 x 39.4 cm	416 lbs 189 kg	51.2" x 37.5" x 20.5" 130 x 95 x 52 cm	482 lbs 219 kg
CP-G60-H	Natural Gas / Liquid Propane	5	150,000	60" x 33" x 15.4" 153 x 83.8 x 39.4 cm	491 lbs 223 kg	63.0" x 37.5" x 20.5" 160 x 95 x 52 cm	568 lbs 258 kg
CP-G72-H	Natural Gas / Liquid Propane	6	180,000	72" x 33" x 15.4" 182.9 x 83.8 x 39.4 cm	594 lbs 270 kg	74.8" x 37.5" x 20.5" 190 x 95 x 52 cm	682 lbs 310 kg

PLAN VIEW --

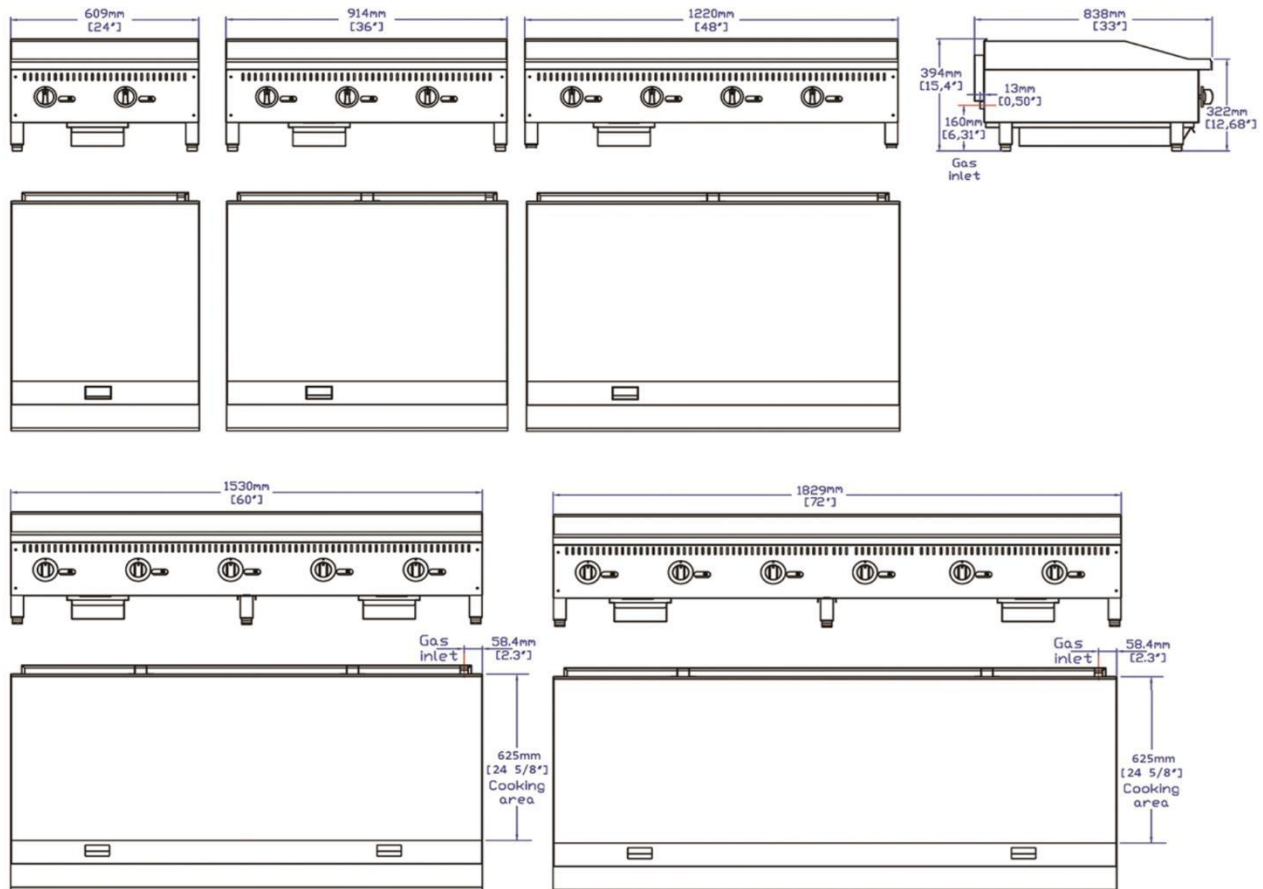

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI)
 Natural gas operating pressure - 5.0" W.C, Recommended supply pressure 7-9" W.C
 Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C
- A gas pressure regulator supplied with unit must be installed.
- An adequate ventilation system is required for Commercial Cooking Equipment.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- ETL certified NSF listed.

