

## Gas Open Pot Fryer

Open pot frypot are easy to clean with no obstruction to clean around.  
The flame transfers heat to plates located strategically outside of the frypot.  
Intense heat rapidly heats the stainless steel sides and the oil inside of the frypot.


CP-VF40  
CP-VF50



### PRODUCT SPECIFICATIONS --

- Open pot structure, Two models at 40 and 50 lbs capacity
- Behind the door snap action millivolt control, Doesn't require electric connection
- The temperature control range 200°F-400°F (93°C-205°C)
- Over temperature protection on 450°F (232°C), more than it, cut off gas
- Four stainless steel adjustable legs
- Large cold zone. captures and holds particles out of the heating zone, reduces taste transfer
- Twin baskets with plastic coated handle
- 1 - 1/4" full port drain valve for fast and complete oil draining

### PLAN VIEW --

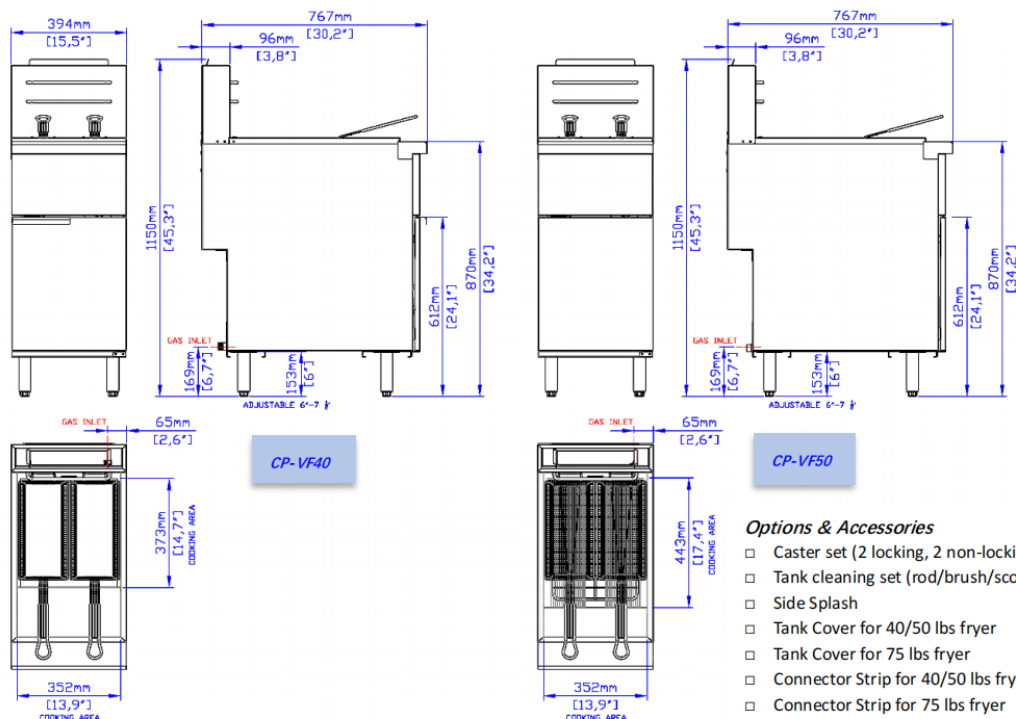

### Options & Accessories

- ☐ Caster set (2 locking, 2 non-locking)
- ☐ Tank cleaning set (rod/brush/scoop)
- ☐ Side Splash
- ☐ Tank Cover for 40/50 lbs fryer
- ☐ Tank Cover for 75 lbs fryer
- ☐ Connector Strip for 40/50 lbs fryer
- ☐ Connector Strip for 75 lbs fryer

### MODEL LIST --

Model	Gas Type	Total BTU	Oil Capacity	Overall Dimensions	Net Weight	Package Size	Shipping Weight
CP-VF40	Natural Gas	100,000	40-50 lbs 18-21 litres	15 5/8" x 30.2" x 45.3" 39.4 x 76.7 x 115 cm	137.5 lbs 62.5 kg	16.6" x 32.3" x 33.5" 42 x 82 x 85 cm	156 lbs 71 kg
CP-VF40	Liquid Propane	100,000	40-50 lbs 18-21 litres	15 5/8" x 30.2" x 45.3" 39.4 x 76.7 x 115 cm	137.5 lbs 62.5 kg	16.6" x 32.3" x 33.5" 42 x 82 x 85 cm	156 lbs 71 kg
CP-VF50	Natural Gas	122,000	50-60 lbs 21.5-25 litres	15 5/8" x 30.2" x 45.3" 39.4 x 76.7 x 115 cm	145 lbs 66 kg	16.6" x 32.3" x 33.5" 42 x 82 x 85 cm	163 lbs 74 kg
CP-VF50	Liquid Propane	122,000	50-60 lbs 21.5-25 litres	15 5/8" x 30.2" x 45.3" 39.4 x 76.7 x 115 cm	145 lbs 66 kg	16.6" x 32.3" x 33.5" 42 x 82 x 85 cm	163 lbs 74 kg

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C. (1/2 PSI)  
Natural gas operating pressure - 4.0" W.C, Recommended supply pressure 7-9" W.C  
Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C
- Special altitude: Natural gas for above 2,000 ft; Propane gas for above 3,500 ft.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- ETL design certified NSF listed
- Unit are not supplied with conversion kits, Gas type must select before ordering.



Intertek

Intertek